


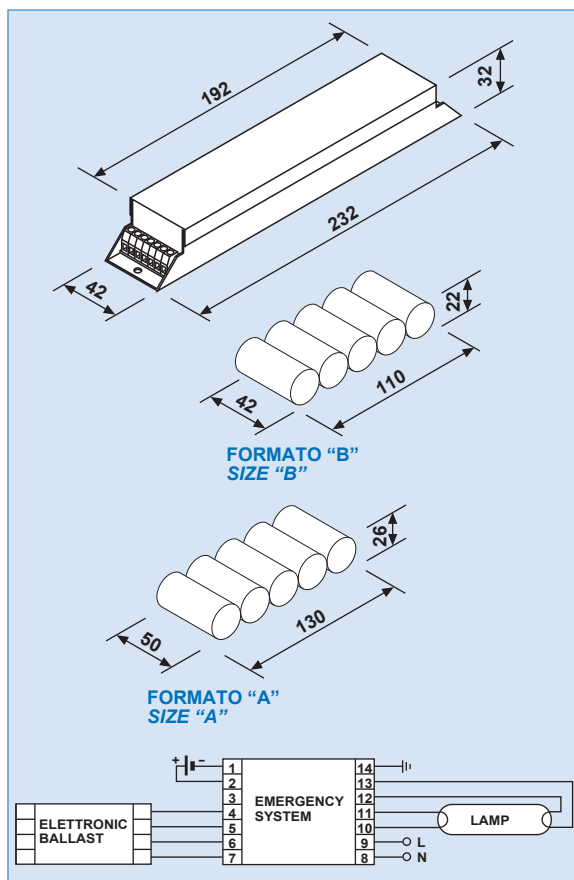
Modulo di Emergenza "HELPLIGHT"

"HELPLIGHT" Emergency Module

Caratteristiche Tecniche Technical characteristics

CARATTERISTICHE GENERALI GENERAL CHARACTERISTICS

TENSIONE ALIMENTAZIONE SUPPLY VOLTAGE	230 Vac
VARIAZIONI DI RETE AMMISSIBILI ALLOWED MAINS VOLTAGE FLUCTUATION	207 - 253 Vac
TEMPO DI INTERVENTO RESPONSE TIME	Istantaneo Instantaneous
FREQUENZA RETE MAINS FREQUENCY	50/60 Hz
FATTORE DI POTENZA (cos Φ) POWER FACTOR (cos Φ)	0,97 Capacitivo 0,97 Capacitive
TEMPERATURA AMBIENTE ROOM TEMPERATURE	0° C + 45° C
TEMPERATURA DI IMMAGAZZINAGGIO STORAGE TEMPERATURE	- 10° C + 50° C
INTERASSI FISSAGGIO INVERTER DISTANCE BETWEEN INVERTER FIXING POINTS	222 mm
DOTATO LED PER LA SEGNALIZIONE PRESENZA RETE EQUIPPED WITH A LED SIGNALLING THAT THE MAINS IS ON	
MARCATURA MARK	
CONFORMITÀ CONFORMS TO	EN 60924 EN 60598-2-22



MODELLO MODEL

HL24L

HL55L

CODICE CODE

ES0005

ES0006

TIPO LAMPADE LAMP TYPE

1 X 18 Watt
Type PL

1 X 24 Watt
Type PL

1 X 36 Watt
Type PL

1 X 55 Watt
Type PL

UTILIZZO UTILIZATION

Permanente
Continuous

Permanente
Continuous

Permanente
Continuous

Permanente
Continuous

ACCUMULATORI BATTERIES

6 Volt 1,8 Ah

6 Volt 1,8 Ah

6 Volt 2,5 Ah

6 Volt 2,5 Ah

AUTONOMIA AUTONOMY

70 min.

60 min.

70 min.

60 min.

RESA LUMINOSA LIGHTING FLUX

40%

40%

20%

25%

TEMPO RICARICA RECHARGE TIME

24 ore
24 hours

24 ore
24 hours

24 ore
24 hours

24 ore
24 hours

ASSORBIMENTO DA RETE ABSORPTION FROM MAINS

8 mA

8 mA

10 mA

10 mA

FUSIBILE FUSE

2 Amp

2 Amp

3,15 Amp

3,15 Amp

PESO INVERTER INVERTER WEIGHT

328 gr.

328 gr.

328 gr.

328 gr.

PESO ACCUMULATORI BATTERIES WEIGHT

250 gr.

250 gr.

360 gr.

360 gr.

FORMATO ACCUMULATORI BATTERIES SIZE

"B"

"B"

"A"

"A"